

ROVA3 GNSS Receiver



ROVA3 is designed to enhance your performance in the field survey and to provide the most reliable positioning result.


It integrates a 1598 channels world leading GNSS positioning engine, a high precision IMU, a patented-designed Farlink UHF radio, and 4G, Bluetooth, wifi... all state-of-art technologies are there to ensure you an excellent working experience.



Key Features

Quick and Reliable Fixed Solution

With the high-gain GNSS antenna of our latest design in 2025, the usability of Glonass & Galileo satellites is greatly improved, so even in harsh environment ROVA3 still is able to track more satellite than other receivers and deliver centimeter accuracy positioning result in few seconds.

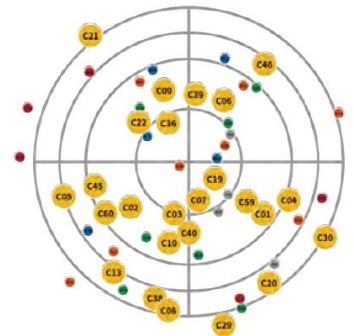

Work Anytime, Anywhere with L-Band

By receiving correction delivered directly from L-band satellites, ROVA3 allows you to achieve 10 to 20 centimeter-level accuracy with only one rover on hand when base receiver or CORS service is not accessible in remote areas. This function is based on Galileo HAS and BDS PPP, please apply the registration code from local distributors.

Powerful and Durable Radio Connectivity

ROVA3 features our patented-designed Farlink radio technology. When it works as an UHF base station ROVA3 is able to transmit correction data farther than others, in good condition the working range can be 10 to 15 km. In 2025, the latest protocol Farlink Pro is added as a new option, for user to cope with challenging environment.

Efficient IMU Tilt Survey

ROVA3's IMU sensor is almost all-time available. When surveyor rotate the pole while walking, or changing the attitude of the receiver, the availability status won't be easily lost. The IMU is calibrate-free.

Superior Endurance & Ruggedness

The newly developed power management system allows ROVA3 to work up to 15-18 hours as rover and can be recharged by a type-C connector.

The shock-resistant frame, water-proof frame all have been enhanced, now the overall proof level is IP68.



SPECIFICATIONS

GNSS Features		Communications	
Channels	1598	I/O Port	4G SIM Card Slot 5-PIN LEMO interface (external power port + RS232) Type-C interface (charge + OTG+ Ethernet) UHF antenna interface
GPS	L1, L1C, L1C/A, L2C, L2P(Y), L5		
GLONASS	G1, G2, G3	Internal UHF	Radio receiver and transmitter, repeater function
BDS	B1I, B2I, B3I, B1C, B2a, B2b		
GALILEO	E1, E5a, E5b, E6, AltBOC*	Frequency Range	410-470MHz
SBAS	L1*	Communication Protocol	Farlink, Farlink Pro, Trimtalk, SOUTH, Satel
IRNSS	L5*	Communication Range	Typically 5-8km with Farlink protocol, up to 15km
QZSS	L1, L2C, L5*	Bluetooth	Bluetooth 3.0/4.1 standard, Bluetooth 2.1 + EDR
MSS L-Band*	BDS PPP & Galileo HAS	NFC Communication	Support
Positioning Output Rate	1Hz~20Hz	Modem	802.11 b/g/n standard
Initialization Time	< 10s		
Initialization Reliability	>99.99%		
Positioning Precision		Data Storage/Transmission	
Code Differential Positioning	Horizontal: 0.25 m + 1 ppm RMS Vertical: 0.50 m + 1 ppm RMS	Storage	4GB SSD internal storage, extendable up to 64GB Support external USB storage (OTG) The customizable sample interval is up to 20Hz
GNSS Static	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 3.5 mm + 0.5 ppm RMS		
Static (Long Observation)	Horizontal: 2.5 mm + 0.1 ppm RMS Vertical: 3 mm + 0.4 ppm RMS	Data transmission	Plug and play mode of USB data transmission Supports FTP/HTTP data download
Rapid Static	Horizontal: 2.5 mm + 0.5 ppm RMS Vertical: 5 mm + 0.5 ppm RMS	Data format	Static data format: STH, Rinex2.01, Rinex3.02 and etc. Differential data format: RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2 GPS output data format: NMEA 0183, PJK plane coordinate, Binary code Network model support: VRS, FKP, MAC, fully support NTRIP protocol
PPK	Horizontal: 3 mm + 1 ppm RMS Vertical: 5 mm + 1 ppm RMS		
RTK(UHF)	Horizontal: 8 mm + 1 ppm RMS Vertical: 15 mm + 1 ppm RMS		
RTK(NTRIP)	Horizontal: 8 mm + 0.5 ppm RMS Vertical: 15 mm + 0.5 ppm RMS		
SBAS Positioning	Typically<5m 3DRMS	Sensors	
RTK Initialization Time	2~8s	IMU	Built-in IMU module, calibration-free, 60°
IMU Tilt Angle	0°~60°	Electronic bubble	Controller software can display electronic bubble, checking leveling status of the carbon pole in real-time
Hardware Performance		Thermometer	Built-in thermometer sensor, adopting intelligent temperature control technology, monitoring and adjusting the receiver temperature
Dimension	135mm(W) ×135mm(L) × 83mm(H)		
Weight	900g (battery included)	User Interaction	
Material	Magnesium aluminum alloy shell	Operating system	Linux
Operating Temperature	-45°C~+75°C	Buttons	Single button
Storage Temperature	-55°C~+85°C	Indicators	Bluetooth, satellites, data, charging and power indicators
Humidity	100% Non-condensing	Web interaction	With access to Web UI via WiFi or USB connection, users can monitor the receiver status and change the configurations
Waterproof/Dustproof	IP68 standard, protected from long time immersion to depth of 1m IP68 standard, fully protected against blowing dust	Voice guidance	Chinese/English/Korean/Spanish/Portuguese/Russian /Turkish/French/Italian
Shock/Vibration	Withstand 2 meters pole drop onto the cement ground naturally	Secondary development	Provides secondary development package, and opens the OpenSIC observation data format and interaction interface definition
Power Supply	6-28V DC, overvoltage protection	Cloud service	The powerful cloud platform provides online services like remote management, firmware updates, online registers, etc.
Battery	7.2V, 6800mAh rechargeable Lithium-ion battery		
Battery Life	15h (rover bluetooth mode)		
*Reserve for future upgrade. Remarks: Measurement accuracy and operation range might vary due to atmospheric conditions, signal multipath, obstructions, observation time, temperature, signal geometry and number of tracked satellites. Specifications subject to change without prior notice.			



No.39, Sicheng Road, Guangzhou 510663, China



www.ruideinstrument.com



export@ruideinstrument.com



ruideinstrument



RUIDEPositioning